

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/040148 A1**

(51) International Patent Classification<sup>7</sup>: **F16B 2/18**,  
E05C 19/14

(21) International Application Number:  
PCT/SE2003/001640

(22) International Filing Date: 22 October 2003 (22.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0203195-3 30 October 2002 (30.10.2002) SE

(71) Applicant and

(72) Inventor: ERIKSSON, Lars [SE/SE]; Hättinge 3445,  
S-635 05 ESKILSTUNA (SE).

(74) Agent: EHRNER & DELMAR PATENTBYRÅ AB;  
Box 103 16, S-100 55 STOCKHOLM (SE).

(81) Designated States (national): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-  
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE  
(utility model), EE, EG, ES, FI (utility model), FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,  
SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: A LOCKING MEANS FOR AN OVER-CENTRE FASTENER

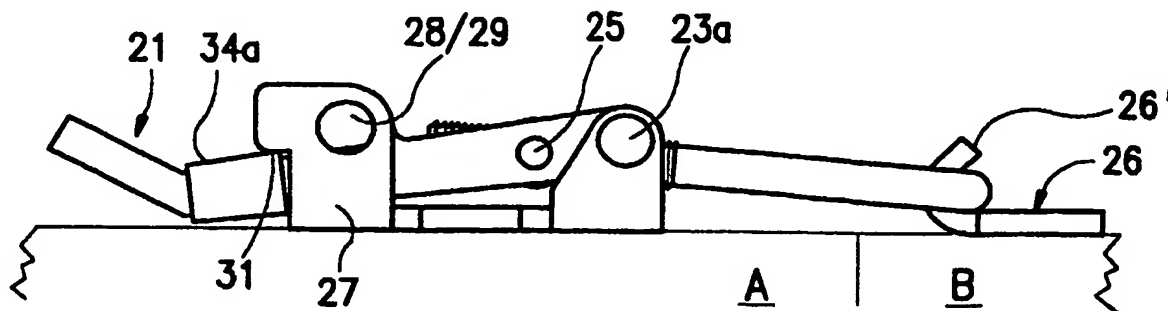

(57) Abstract: A locking means for an over-centre fastener for preventing unintentional opening of a lever of the fastener, comprises a spring (30) attached to the lever (21a) and abutment means (31) associated with a the stationary part (20) of the fastener. The spring (30) has one end attached to the lever (21a) and an opposite, movable end thereof forms engagement means (34a) engaging the abutment means (31) in a closed position of the fastener. Said opposite end of the spring is formed with guide means (34a, 34c) guiding movement of said opposite end of the spring relative to the lever (21a).

## A LOCKING MEANS FOR AN OVER-CENTRE FASTENER

The present invention concerns a locking means for an over-centre fastener according to the preamble of claim 1.

Over-centre fasteners (also denominated toggle fasteners or  
5 latches) are commonly used for securing - and often clamping -  
two objects together, such as keeping a lid in a closed  
position on a box or case. A first part of the fastener,  
referred to as a striker and often having a hook-like shape,  
is attached to one of the objects. A base member of the other  
10 part of the fastener is attached to the other object.

An inherent feature of over-centre fasteners is the self-  
locking property when closed and under load. At occasions, it  
may occur that the load is permanently or temporarily  
decreased, such as due to vibration or shock, and in such  
15 cases the operating lever of the fastener may be set in motion  
to an extent that it passes the dead point of the over-centre  
mechanism. The consequence is not only that the clamping force  
of the fastener is lost, but may even involve damage or  
injury.

20 EP 1 179 393 A1 discloses a large-scale clamp mechanism  
mechanically resembling an over-centre fastener, but not  
having the self-locking property thereof. Thus, in order to  
hold the clamp mechanism in a closed position, its operating  
handle carries a spring loaded lock member engaging a latch  
25 extending from a stationary base member. The lock member is  
released from its engagement with the latch by manually  
depressing it against the spring force, thereby enabling  
raising of the handle and release of the clamp mechanism.

Although useful also for locking a true over-centre fastener,  
30 this prior art device has the apparent drawback that, applied

to a normal-sized over-centre fastener, its lock member would be cumbersome and obstructive to the easiness of operating the fastener, since it extends substantially perpendicularly downwards from a mid-portion of the handle.

- 5 The present invention has as its object to provide a manually releasable spring loaded locking means that sets aside the aforementioned drawback.

Thus, there is provided a locking means for an over-centre fastener for preventing unintentional opening of the fastener,  
10 including manually releasable spring-action retaining means acting between a movable lever and a stationary part of the fastener. The spring action retaining means comprise a spring attached to the lever, and an abutment means is associated with the stationary part. The spring has one end attached to  
15 the lever and an opposite, movable end thereof forming engagement means is adapted to engage the abutment means in a closed position of the fastener, said opposite end of the spring being formed with guide means guiding movement of said opposite end of the spring relative to the lever.

- 20 Embodiments of the present invention will now be described, reference being made to the accompanying drawings, wherein:

Fig. 1 is a side view of an over-centre fastener according to a preferred embodiment of the present invention shown in a open position;

Fig. 2 is a plan view of the fastener of Fig. 1;

Fig. 3 is a side view of the fastener according to Figs. 1 and 2 in a closed position;

Fig. 4 is a plan view of the fastener as shown in Fig. 3;

Fig. 5 is a section at an enlarged scale taken along line V-

V in Fig. 4;

Fig. 6 is a section at an enlarged scale taken along line VI-VI in Fig. 2;

Fig. 7 is a side view of a leaf spring used in the embodiment of Figs. 1 - 6 shown in the scale of Figs. 5 and 6;

Fig. 8 is a side view of an over-centre fastener having a wire spring as a retaining means and being shown in a closed position;

Fig. 9 is a plan view of the fastener of Fig. 8;

Fig. 10 is a plan view of the fastener of Figs. 8 and 9 showing the wire spring in its released position; and

Fig. 11 is a section taken along line XI-XI in Fig. 9.

The over-centre fasteners according to the present invention are based on a conventional fastener. Such fastener will be described with reference to Figs. 1 - 4. It comprises a base plate 20 to be fixed to one object A to be clamped to another object B, a lever 21 and an engagement member 22. The lever 21 is swingable about rivets 23a, 23b engaged in spaced brackets 20a, 20b protruding from the base plate 20. A first end 22a of the engagement member 22 is threaded and engages internal threads of a cylindrical body 24 which is linked to the lever 21 at a distance from the rivets 23a, 23b. More precisely, the cylindrical body 24 is carried between spaced legs 21a, 21b of the lever 21 so as to be rotational about stub shafts 25 engaged in the spaced legs. A free end of the engagement member 22 is formed with an eye 22b for engagement with a hook-like end 26' of a striker 26 attached to object B. Often, there is a further bracket 27 integral with the base plate and having a hole 28 which is aligned with a hole 29 in the lever

21 in its closed state for the purpose of locking the lever to the base plate by means of a padlock.

Apart from such positive locking, in a conventional over-centre fastener being in its closed state according to Fig. 3 and being under clamping tension, substantially only the force from the engaging member directed into the rotational centre of the cylindrical body 24 prevents the lever 21 from passing over the dead point and releasing the clamping force.

To prevent this, the present invention provides a manually releasable snap-lock mechanism arranged between the stationary base plate 20 and the lever 21.

A first, preferred embodiment of such mechanism is shown in Figs. 1 - 7. It includes a leaf spring 30, carried by the lever 21 and being separately shown in Fig. 7, and an engagement surface 31 associated with the base plate 20, in this case formed on the bracket 27.

The leaf spring 30 is elongate and its main plane extends in its normal, unstrained state along the inner side of leg 21a. It has a hole 32 at one of its ends and a further hole 33 at a distance therefrom. This end of the spring is fixed to the leg 21a by being clamped between the inner end of the leg and, on one hand, the clinched inner end 23a' of rivet 23a extending through hole 32, and, on the other hand, the cylindrical body 24, the stub shaft 25 of which extends through the hole 33.

The free end of the leaf spring carries along its upper edge 30a an integral flap 34. A substantially horizontal portion 34a thereof extends at substantially 90° from the main plane of the spring so as to extend above and beyond the leg 21a of the lever 21 (Figs. 4 and 5) a distance substantially equal to or somewhat greater than the width of the leg 21a. The free end

of the horizontal portion 34a is bent down to form a substantially vertical portion 34b, and its free end is further inwardly bent to form a lower, substantially horizontal portion 30c extending below the leg 21a. As will be  
5 seen in Fig. 5, the free edge 30c of the lower horizontal portion 34c leaves a small space to the lower edge 30b of the leaf spring that is less than the width of the leg 21a.

In the closed position of the lever 21 shown in Figs. 3 - 5, the upper horizontal portion 34a is located underneath the  
10 engagement surface 31 of the bracket 27 and prevents upward movement of the lever as seen particularly in Figs. 3 - 5.

To release the lever, the flap 34 is pressed to the left in Fig. 5 so as to resiliently move its horizontal portion 34a from its position underneath the engagement surface 31. In the  
15 position of the flap 34 shown in Fig. 6, in which its substantially vertical portion 34b abuts the exterior side of leg 21a, the lever is released and is free to be opened, whereupon the leaf spring may regain its unloaded position along the leg 21a. When again closed, a bevelled cam surface  
20 35 of the bracket 27 engages the lower horizontal portion 34c and forces the leaf spring to deflect inwardly until the upper horizontal portion 34a has reached a position just before that of Fig. 6 and is free to regain its unstrained locking position. The movements of the leaf spring are guided by the  
25 upper and lower horizontal portion 34a, 34c sliding against the upper and lower surfaces, respectively, of leg 21a.

In a second embodiment of the present invention shown in Figs. 8 - 11 a wire spring 36 is used as a retaining means. One end of a straight main portion 36a of the spring is bent at 90° and  
30 an eye 36b is formed at the free end thereof. A rivet 37 attaches the spring to the leg 21b of the lever 21. The





straight main portion 36a of the spring extends  
perpendicularly from the leg 21b and passes beyond the leg  
21a. The free end of the spring is bent to form a U-shaped,  
manually releasable catch 36c straddling the leg 21a. In the  
5 closed position of the lever 21 shown in Figs. 8, 9 and 11, an  
upper leg 36e of the catch engages a notch 38 in the bracket  
27' in this embodiment being located between the legs 21a, 21b  
of the lever 21. To release the lever, the catch is pressed  
downwardly in Figs. 9 and 10. Movement of the catch is guided  
10 by its two opposed legs 36d, 36e straddling the leg 21a of the  
lever.

## CLAIMS

1. A locking means for an over-centre fastener for preventing unintentional opening of the fastener, including manually releasable snap-action retaining means (30, 34; 36) between a  
5 movable lever (21) and a stationary part (20, 27) of the fastener, said retaining means comprising a spring (30; 36) attached to the lever (21a; 21b) and abutment means (31; 38) associated with the stationary part (20, 27),  
characterized in that the spring (30) has one end  
10 attached to the lever (21a) and an opposite, movable end thereof forming engagement means (34a; 36a) adapted to engage the abutment means (31; 38) in a closed position of the fastener, said opposite end of the spring being formed with  
guide means (34a, 34c; 36d, 36e) guiding movement of said  
15 opposite end of the spring relative to the lever (21a).
2. The locking means according to claim 1,  
characterized in that the spring is a leaf spring  
(30).
3. The locking means according to claim 1,  
20 characterized in that the spring is a wire spring  
(36).
4. The locking means according to claim 2 or 3,  
characterized in that said guide means comprise at  
least one portion (34a, 34c; 36, 36d) of said spring (30; 36)  
25 bent to encompass a portion of said lever.



1/3

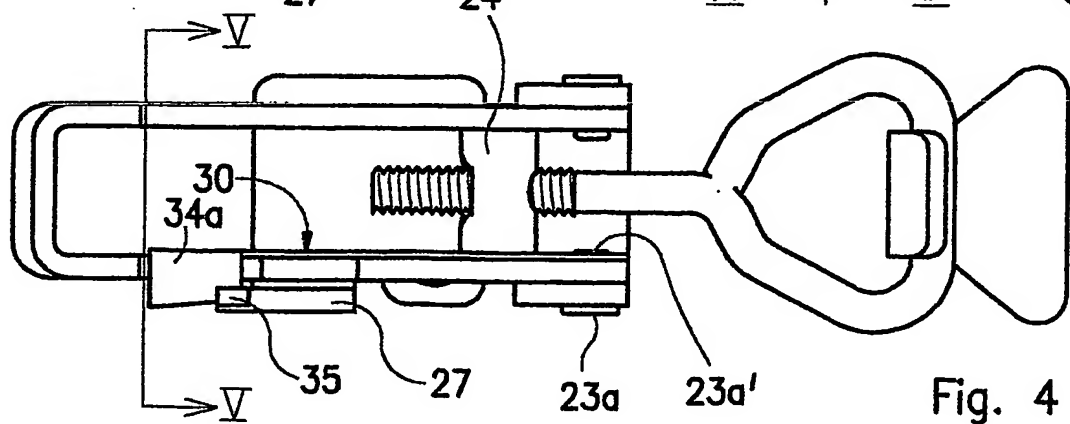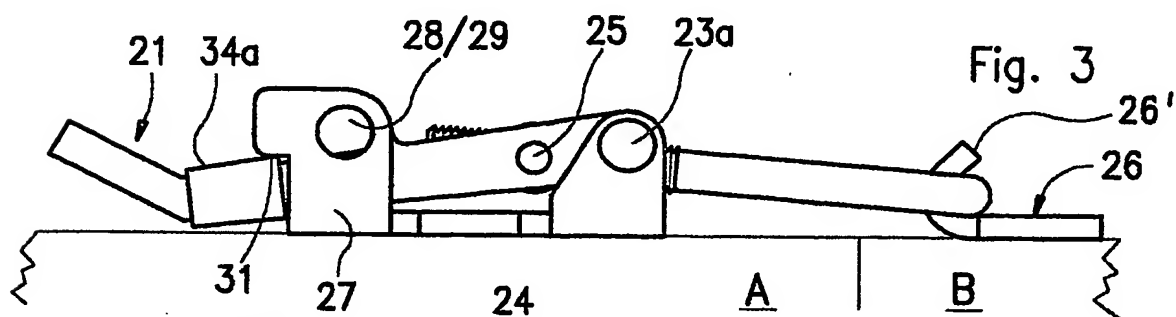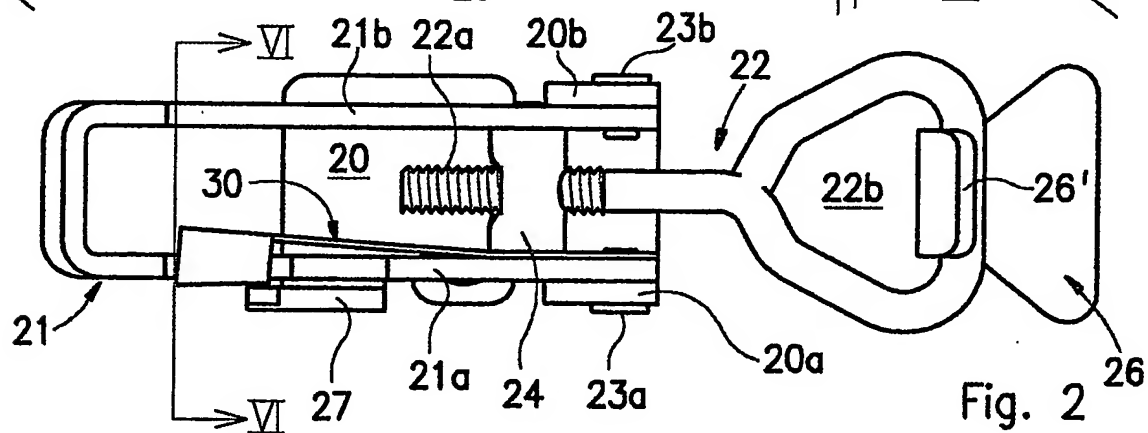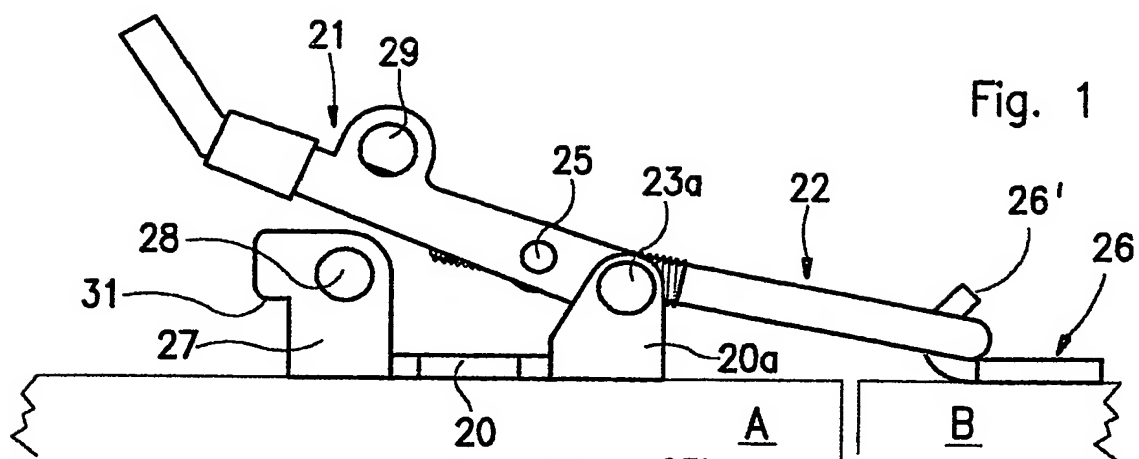

2/3

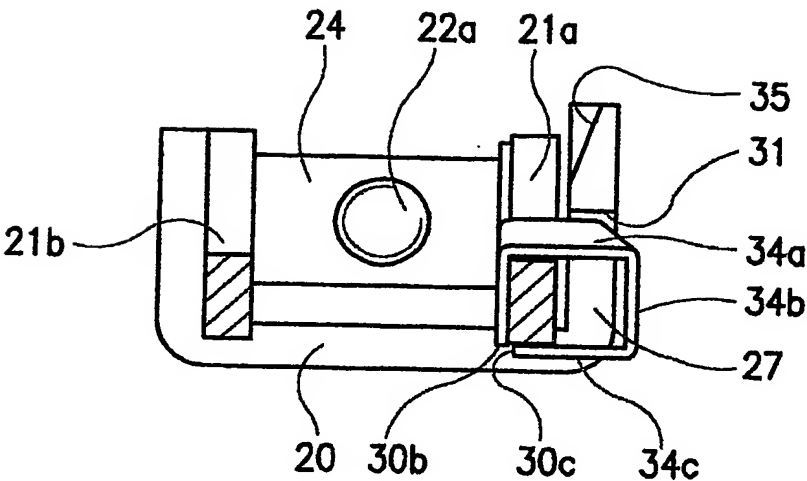


Fig. 5

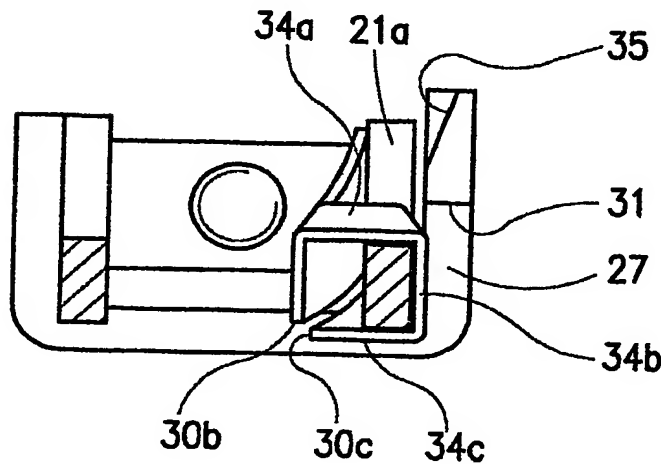


Fig. 6

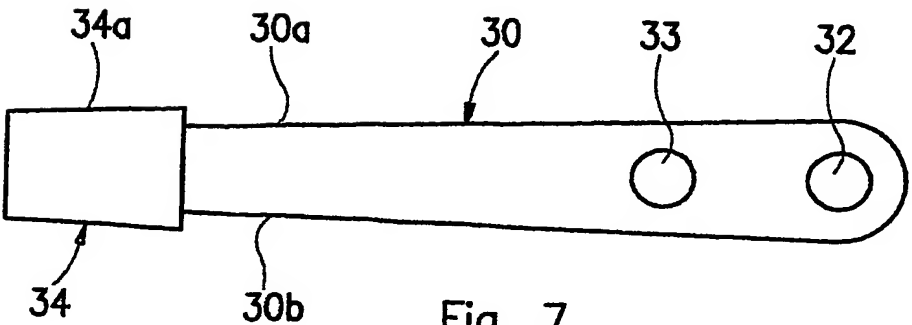


Fig. 7

3/3

Fig. 8

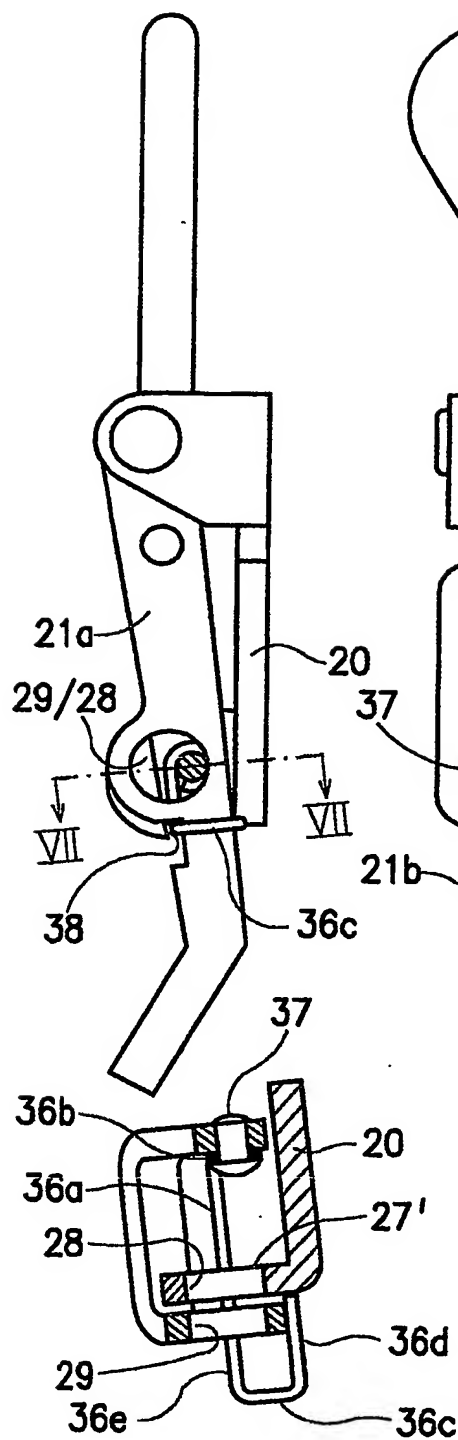


Fig. 9

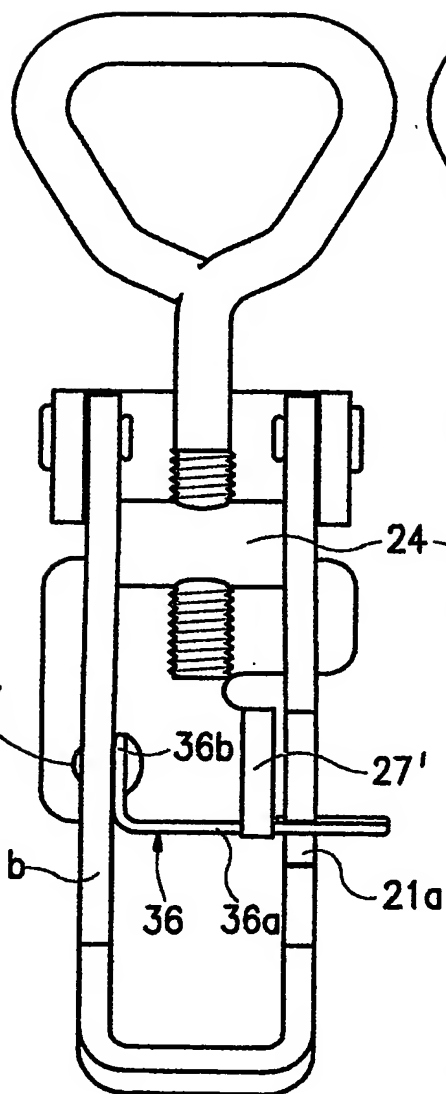


Fig. 10

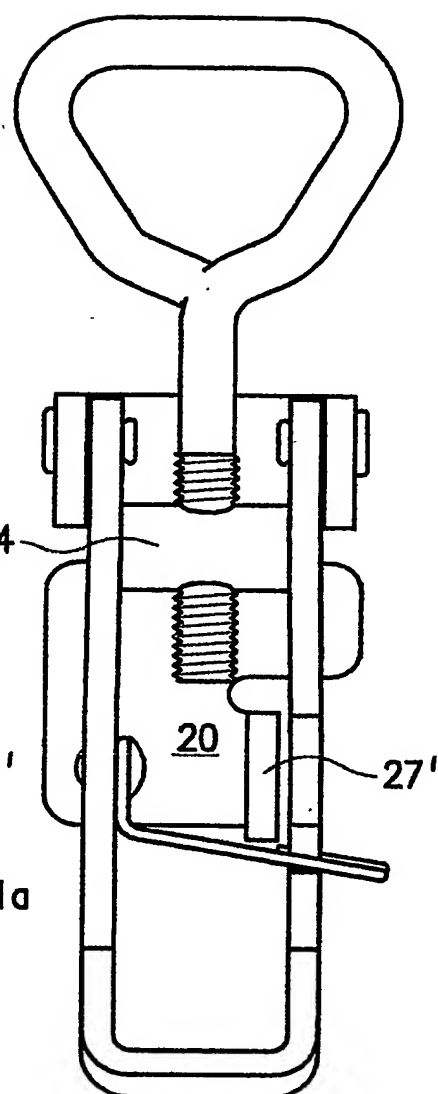


Fig. 11

## INTERNATIONAL SEARCH REPORT

national application No.  
PCT/SE 2003/001640

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F16B 2/18, E05C 19/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F16B, E05C, B25B, B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1179393 A1 (DELAWARE CAPITAL FORMATION, INC.), 13 February 2002 (13.02.2002), figures 1-3, abstract  -----	1-4

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "B" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 January 2004

Date of mailing of the international search report

27-01-2004

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Jan-Axel Ylivainio / JA A  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 2003/001640

EP	1179393	A1	13/02/2002	CA	2332293	A	11/02/2002
				US	6374465	B	23/04/2002

---